



Features

- Ready to use, the kit comes with all the necessities to perform the installation.
- Easy height adjustment, no tools required.
- Compatible with other fixings like SAP M8, BTS6 H M8, etc.
- Flexible, can be installed in different types of ceilings.
- Easy to transport, store and handle as its smaller and simpler than traditional systems.
- Low visible impact compared to traditional methods.

Certificates and approvals




Base materials

- Metal corrugated
- Concrete (only with SAP or BTS 6 H)
- Precast hollow core slabs (only with BTS6 H)

Main dimensions

Description	Reference	Length [m]	Diameter [mm]
WFS 2.0 mm eye bolt end 3 m	9203M8EWFS	3	2.0
WFS 2.0 mm eye bolt end 5 m	9205M8EWFS	5	2.0

Installation procedure

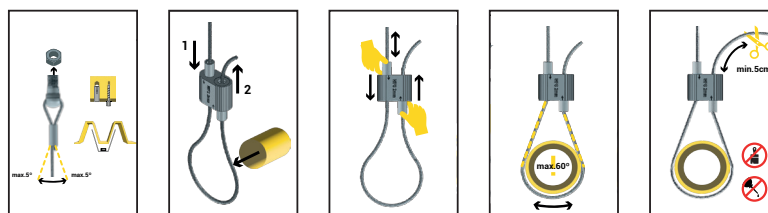

Breaking loads

Description	Reference	Length [m]	Diameter [mm]	Safety Working Load [kg]
WFS 2.0 mm eye bolt end 3 m	9203M8EWFS	3	2.0	56
WFS 2.0 mm eye bolt end 5 m	9205M8EWFS	5	2.0	56

Estas cargas se han tomado del informe de ensayo de TÜV SÜD n°. GGN/H(M)/24/001471.

Product specifications

- Gripper material: Aluminum
- Applicable Manufacturing standard of wire rope: ASTM A1023
- Wire Material: Galvanized steel
- Wire coating: Hot dip galvanising
- Wire rope construction: 7x7 strand construction