



ADD1218 - ADD1218C - ADD2418


						Courant de charge batterie Battery charge	
ADD1218	93 x 18 x 58,90 mm	220 - 240V AC 50/60 Hz 1 A	12 V DC + 15 %	1,5 A	18 W	/	
ADD1218C			24 V DC + 15 %	0,75 A		150 mA	
ADD2418						/	
 20	 2,5 mm ² max	 0,075 kg	 -10 / +50°C	 LED V OUT OK			
Nombre de modules - number of modules			1	Isolation : classe II - Insulation: Class II			
Protection PTC contre les surtensions et les courts-circuits Short circuit and overload PTC proof			 Batterie non fournie / max. 1 x 7 Ah Battery not included / max. 1 x 7 Ah				

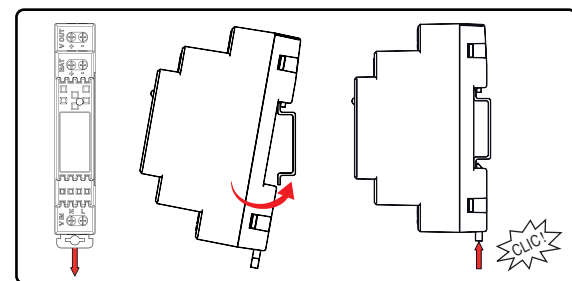


DIN-RAIL EN 50 022 (TS35/7,5 or TS35/15)

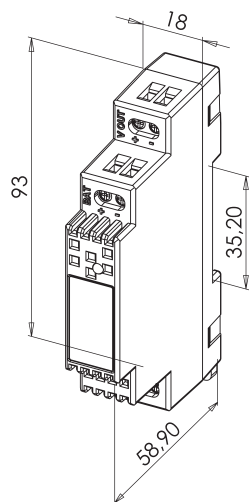

Sortie - Output

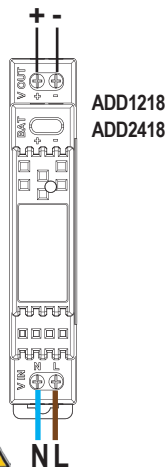

Sortie - Output

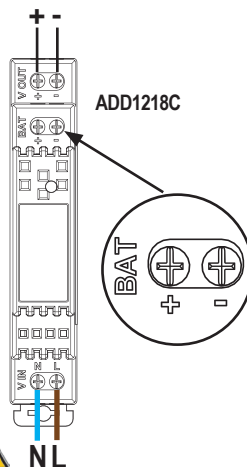

Consignes de tri pouvant varier localement : www.consignesdetr.fr