



Features

- Ready to use, the kit comes with all the necessities to perform the installation.
- Easy height adjustment, no tools required.
- Fast installation with a nailer. Compatible with FORCE ONE, FOX, and others.
- Flexible, can be installed in different types of ceilings.
- Easy to transport, store, and handle, as it is smaller and simpler than traditional systems.
- Low visible impact compared to traditional methods.

Certificates and approvals




Base materials

- Steel beam (XHA nail required)
- Concrete (XHA / TKA nail required)
- Hollow aerated concrete (XHA nail required)
- Solid brick (TKA nail required)
- Wood (XHA nail required)

Main dimensions

Description	Reference	Length [m]	Diameter [mm]
WFS 1.5 mm loop end + AAT 3 m	9153AWFS	3	1.5
WFS 1.5 mm loop end + AAT 5 m	9155AWFS	5	1.5

Installation procedure

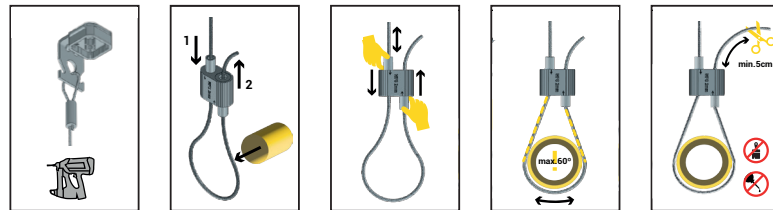

Breaking loads

Description	Reference	Length [m]	Thickness [mm]	Safety Working Load [kg]
WFS 1.5 mm loop end + AAT 3 m	9153AWFS	3	1.5	30
WFS 1.5 mm loop end + AAT 5 m	9155AWFS	5	1.5	30

These loads are taken from TÜV SÜD test report no. GGN/H(M)/24/001471.

Product specifications

- Gripper material: Aluminum
- Applicable Manufacturing standard of wire rope: ASTM A1023
- Wire Material: Galvanized steel
- Wire coating: Hot dip galvanising
- Wire rope construction: 7x7 strand construction